



MODERN PLANT

**STUART
TURNER**
ENGINEERED TO EXCEL



**POWERING
WATER
FOR EVERY
APPLICATION**

AQUABOOST | MAINSBOOST | MONSOON | SHOWERMATE | WASTEFLO | STUART

Showermate pumps



SMALL
DOMESTIC
PROPERTY

LARGE
DOMESTIC
PROPERTY

High quality plastic pumps providing a cost effective solution to boost the performance of a single tap, shower or complete bathroom.

Showermate pumps are an ideal choice for domestic homes with a single shower and bathroom.



Economy
without
compromise

Showermate Features and benefits

Showermate provides a range of high quality, high performing, water boosting pumps suitable for multiple applications within a bathroom. Designed to boost the performance of shower and tap outlets within a bathroom. The range is suitable for positive and negative head applications and all Showermate pumps are simple to install and very quiet in operation.



Performance

- 1.5 to 2.6 bar performance options
- Positive or negative head options
- Twin or single
- Quiet operation*
- System friendly peripheral design
- Fully automatic switching
- Dry run protection
- Continuously rated

Quality

- WRAS approved
- ISO 9001:2015
- BS EN 60335 compliant
- CE compliant

Reliability

- 3 year guarantee
- Durable plastic construction
- Extended life mechanical seal



Showermate ECO provides a compact entry level pump suitable for single application use.

Good to know

Showermate pumps are supplied with 200 mm anti-vibration flexible hoses with integral isolation valves, G 3/4 threaded connections to the pump, 15 mm push-fit to pipework, anti-vibration feet and pre-wired for ease of installation.

* Independently tested – 1.5 and 2.0 bar Showermate ECO twin rated quieter than competitor's equivalent models.

Showermate Pump applications

This application table is a general guide only and individual site conditions may vary. For advice or technical assistance in choosing the right pump, please contact **TechAssist** on +44 (0) 800 31 969 80

	Showermate						Showermate ECO			Showermate TP				
	Twin				Single		Twin		Single	Twin		Single		
	1.8	2.6		2.6		1.5	2.0	2.0	1.5	2.0	2.0			
	Uni	Std	Uni	Std	Uni	Std	Std	Std	Std	Std	Std			
Pressure bands	Medium													
Boost hot or cold water to individual taps					●	●			●			●		
Bath or basin mixer	●	●	●	●			●	●		●	●			
Boost hot water pressure to blend with mains cold water					●									
Shower only	●	●	●	●			●	●		●	●			
Blended shower water									●			●		
Multi-function shower with body jets														
Boost tank fed cold water supply to electric shower					●									
Standard bath-shower/shower	●	●	●	●			●	●						
Bathroom only	●	●	●	●	● _{x2}									
Supply to combination boiler from a break tank														
Apartments														
Whole house – up to 2 bathrooms														
Whole house – up to 3 bathrooms														


Showermate Product range



Part No	Model
46532	U1.8 bar Twin
46533	U2.6 bar Twin

Showermate Universal twin


Universal Twin pumps are designed for installation into vented systems to pump both the hot and cold water supplies, boosting both equally. Suitable for both positive and negative head applications. They offer a high quality option for boosting water in a complete bathroom or to an individual shower and do not require a gravity flow of water to operate.

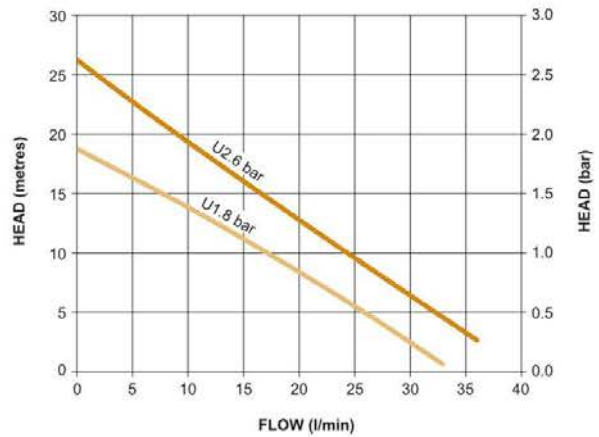

Part No	Model
46534	U2.6 bar Single

Showermate Universal single


Universal single pumps can be used in pairs to boost vented systems to pump hot and cold water supplies independently, or as a single pump to boost a water supply as required. They are suitable for both positive and negative head applications and do not require a gravity flow of water to operate.

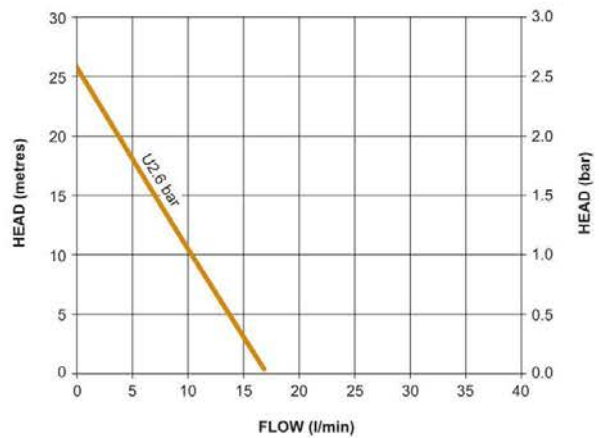



Showermate Standard twin

Standard Twin pumps are designed for installation into vented systems to equally boost both hot and cold water supplies to the bathroom or single shower. They require a gravity flow of 0.8 litres per minute through the outlet to operate and are suitable for positive head applications only.

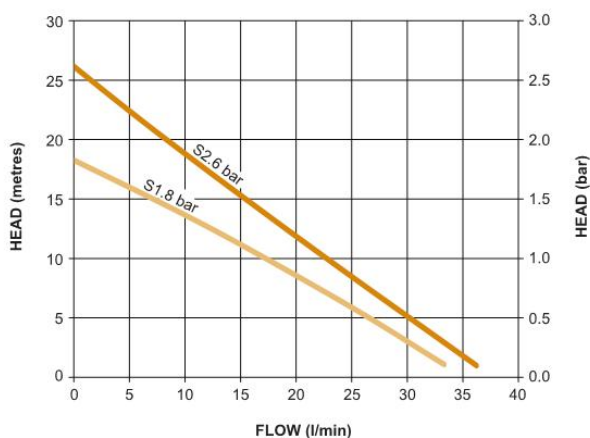


Part No	Model
46407	S1.8 bar Twin
46431	S2.6 bar Twin



Showermate Standard single

Standard single pumps are ideal for boosting either the hot or cold water supply of a positive head application in vented systems. They require a gravity flow of 0.8 litres per minute through the outlet to operate and are ideal for boosting the blended water to an outlet.

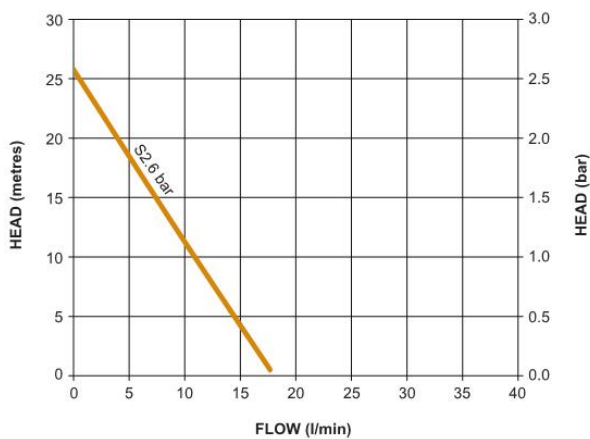

Part No	Model
46429	S2.6 bar Single


Showermate ECO Product range



Part No	Model
46502	S1.5 bar Twin
46500	S2.0 bar Twin

Showermate ECO Standard twin


Delivers a cost effective, high performance shower pump. At 30% smaller than the standard Showermate pump, bathroom designers and installers can specify the 'eco' model in a wide range of situations, including small and confined spaces. Standard Twin pumps are designed to boost the incoming hot and cold water supply to an individual shower, bath, shower mixer or mixer tap. Suitable for positive head applications only.

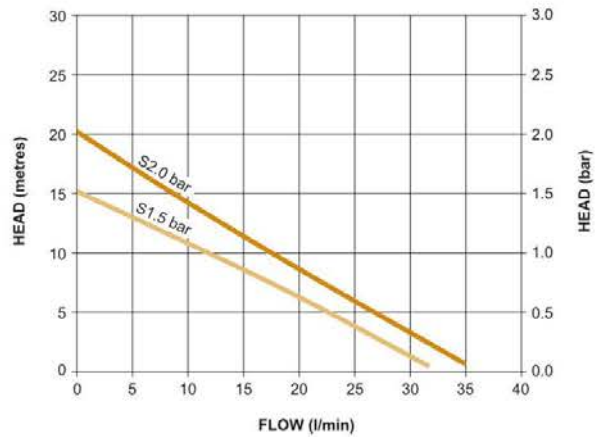

Part No	Model
46503	S2.0 bar Single

Showermate ECO Standard single

Standard Single pumps are designed to improve water supplies to single taps or to pump blended water from a shower mixer. Suitable for positive head applications only.

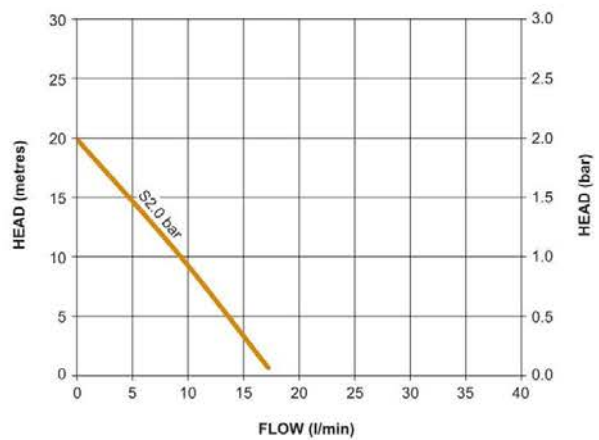

Showermate TP Product range

1 YEAR
GUARANTEE


From **53** dB(A)
Quiet Operation

WRAS
APPROVED PRODUCT



Showermate TP Standard twin

Standard Twin impeller pumps are designed to boost the incoming hot and cold water supply to an individual shower, bath, shower mixer or mixer tap. Despite being an entry level pump, Showermate TP will significantly improve water pressure to a single appliance and is suitable for positive head applications only.

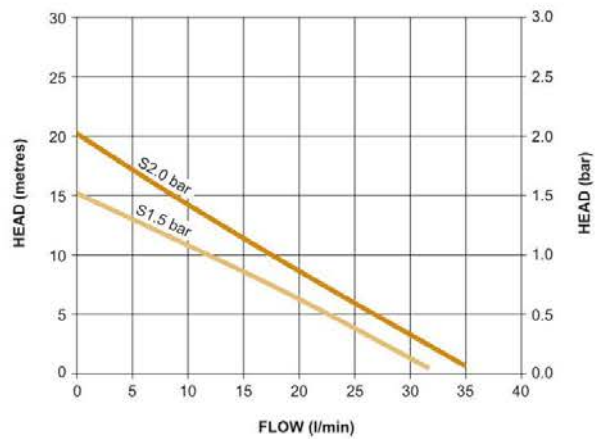

Part No	Model
49084	S1.5 bar Twin
49085	S2.0 bar Twin

1 YEAR
GUARANTEE


From **56** dB(A)
Quiet Operation

WRAS
APPROVED PRODUCT



Showermate TP Standard single

Standard Single pumps are designed to improve hot or cold water supplies to single taps or to pump blended water from a shower mixer. This pump requires a gravity flow of 0.8 litres per minute to start and is suitable for positive head applications only.

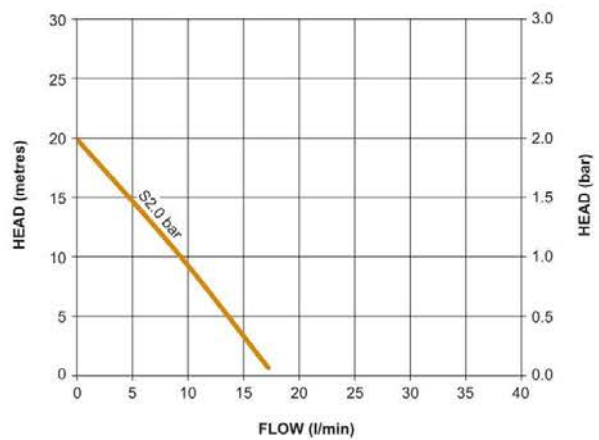

Part No	Model
49086	S2.0 bar Single

Technical Datasheets available at www.stuart-turner.co.uk | 63

Stuart Turner Ltd
Market Place
Henley-on-Thames
Oxfordshire
RG9 2AD
England

Telephone +44 (0) 1491 572655
Fax +44 (0) 1491 573704
E-mail info@stpumps.co.uk

www.stuart-turner.co.uk

VAT Reg No. 193 7627 68. Registered in England No. 88368
Registered Office: Market Place, Henley-on-Thames
Stuart Turner Ltd reserves the right to alter or change
specification without notice.

Part No 19243
Issue No 4617/10-01



For more information about Stuart Turner or any other Stuart Turner product please contact Modern Plant. Our team of experts are on call to answer all your questions and provide you with advice to ensure your project is successful.

Web: www.tapsandshowers.ie | Email: sales@modernplant.ie | Tel: 01 461 4300