

# STUART

## Water Conditioner CM

WRAS Approved and developed specifically for commercial and industrial applications, the Stuart Water Conditioner CM combines a unique catalytic alloy core with an array of powerful magnets to effectively prevent hard limescale deposits from forming.

Available in a range of sizes optimised to meet the flow rate requirements of commercial properties, industrial plant and processes, they offer a maintenance free solution and are simply installed in-line with the existing pipework.



**10 YEAR**  
GUARANTEE

### Features


- Prevents limescale build up – maximises appliance efficiency and reduces energy costs
- Reduces maintenance requirements, minimising costs and maximising up-time
- Maximum pressure drop 2%
- Compact design – easy to install in any orientation
- Environmentally friendly, does not use chemicals or salts
- Treated water is safe to drink
- No electrical power required
- 10 year guarantee
- Available in a range of sizes and flow rates

### Application

- Available in a range of sizes optimised to meet the flow rate requirements of residential properties
- Installed inline with the incoming mains water supply just after the stopcock
- Stuart Water Conditioner products can play an effective role in achieving compliance with Part L of the Building Regulations

\*Model selection must be based upon actual measured flow and is essential for effective operation.

| Model            | Water Conditioner<br>CM686-1260<br>44732 |
|------------------|--|
| Guarantee        | 10 year                                  |
| Approvals        | CE                                       |
| Type             | Catalytic-magnetic                       |
| Optimum flow*    | 686-1260 l/min                           |
| Maximum pressure | 16 bar                                   |
| Housing          | Stainless steel                          |
| Connection type  | PN16 Flange                              |
| Connection size  | 100 mm                                   |
| Typical noise    | Silent                                   |
| Width            | 850 mm                                   |
| Diameter         | 168 mm                                   |
| Weight           | 46.0 Kg                                  |

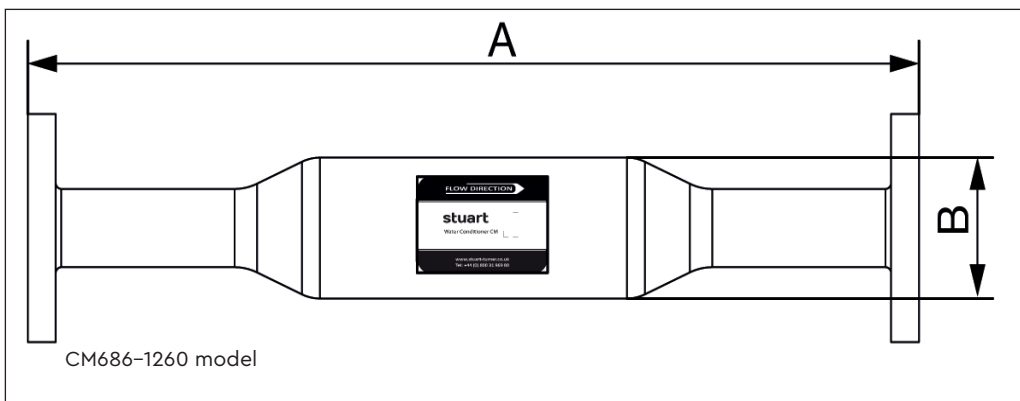

| Model      | Dim. 'A' | Dim. 'B' |
|------------|----------|----------|
| CM686-1260 | 850 mm   | 168 mm   |