

# STUART

## Water Conditioner CM

WRAS Approved and developed specifically for commercial and industrial applications, the Stuart Water Conditioner CM combines a unique catalytic alloy core with an array of powerful magnets to effectively prevent hard limescale deposits from forming.

Available in a range of sizes optimised to meet the flow rate requirements of commercial properties, industrial plant and processes, they offer a maintenance free solution and are simply installed in-line with the existing pipework.



**10 YEAR**  
GUARANTEE

### Features


- Prevents limescale build up – maximises appliance efficiency and reduces energy costs
- Reduces maintenance requirements, minimising costs and maximising up-time
- Maximum pressure drop 2%
- Compact design – easy to install in any orientation
- Environmentally friendly, does not use chemicals or salts
- Treated water is safe to drink
- No electrical power required
- 10 year guarantee
- Available in a range of sizes and flow rates

### Application

- Available in a range of sizes optimised to meet the flow rate requirements of residential properties
- Installed inline with the incoming mains water supply just after the stopcock
- Stuart Water Conditioner products can play an effective role in achieving compliance with Part L of the Building Regulations

\*Model selection must be based upon actual measured flow and is essential for effective operation.

Model	Water Conditioner CM361-685 44731
Guarantee	10 year
Approvals	CE
Type	Catalytic-magnetic
Optimum flow*	361-685 l/min
Maximum pressure	16 bar
Housing	Stainless steel
Connection type	PN16 Flange
Connection size	80 mm
Typical noise	Silent
Width	850 mm
Diameter	141 mm
Weight	30.0 Kg

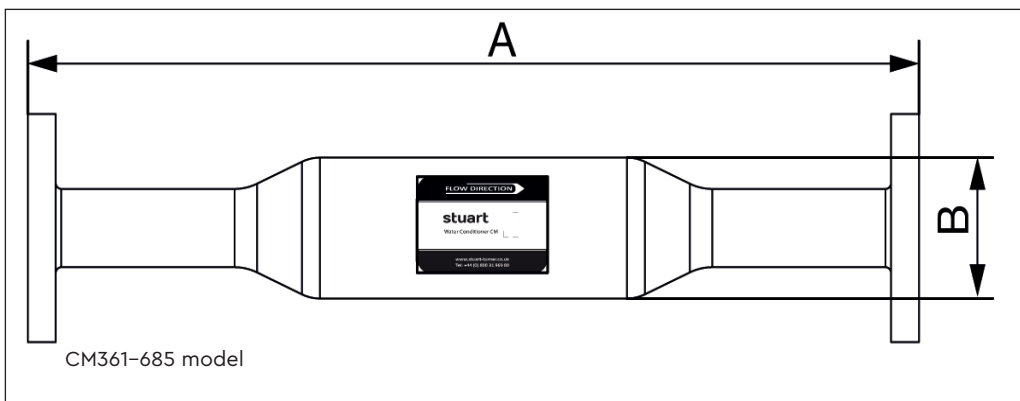

Model	Dim. 'A'	Dim. 'B'
CM361-685	850 mm	141 mm