

STUART

Water Conditioner CM

WRAS Approved and developed specifically for commercial and industrial applications, the Stuart Water Conditioner CM combines a unique catalytic alloy core with an array of powerful magnets to effectively prevent hard limescale deposits from forming.

Available in a range of sizes optimised to meet the flow rate requirements of commercial properties, industrial plant and processes, they offer a maintenance free solution and are simply installed in-line with the existing pipework.



10 YEAR
GUARANTEE

Features


- Prevents limescale build up – maximises appliance efficiency and reduces energy costs
- Reduces maintenance requirements, minimising costs and maximising up-time
- Maximum pressure drop 2%
- Compact design – easy to install in any orientation
- Environmentally friendly, does not use chemicals or salts
- Treated water is safe to drink
- No electrical power required
- 10 year guarantee
- Available in a range of sizes and flow rates

Application

- Available in a range of sizes optimised to meet the flow rate requirements of residential properties
- Installed inline with the incoming mains water supply just after the stopcock
- Stuart Water Conditioner products can play an effective role in achieving compliance with Part L of the Building Regulations

*Model selection must be based upon actual measured flow and is essential for effective operation.

Model	Water Conditioner CM266-360 44730			
Guarantee	10 year			
Approvals	CE			
Type	Catalytic-magnetic	Catalytic-magnetic	Catalytic-magnetic	Catalytic-magnetic
Optimum flow*	266-360 l/min	46-75 l/min	76-115 l/min	116-170 l/min
Maximum pressure	16 bar			
Housing	Stainless steel			
Connection type	PN16 Flange	BSP Male	BSP Male	BSP Male
Connection size	65 mm	1 "	1¼ "	1½ "
Typical noise	Silent			
Width	800 mm	550 mm	550 mm	
Diameter	114 mm	73 mm	73 mm	89 mm
Weight	18.0 Kg	6.0 Kg	6.5 Kg	8.0 Kg

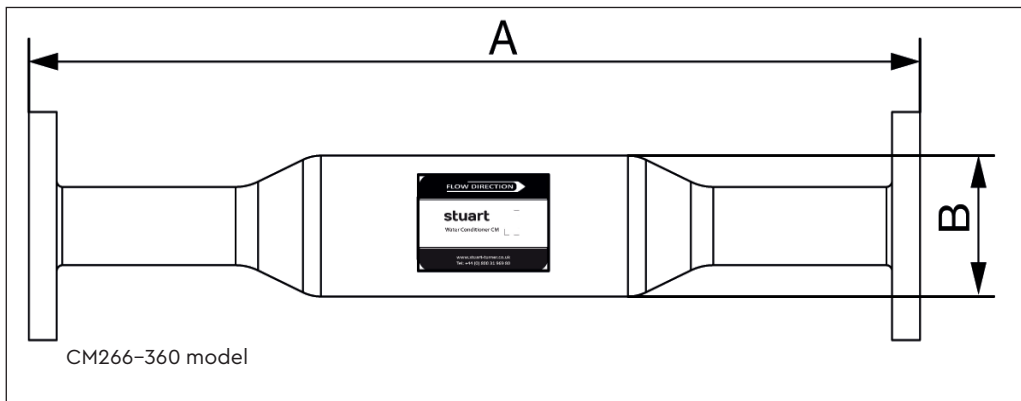

Model	Dim. 'A'	Dim. 'B'
CM266-360	800 mm	114 mm