


**Range:** PRESTO DL 400 SE®

**Ref:** 27460 - Timed flow single tap for exposed shower with straight stop valve, antibacterial

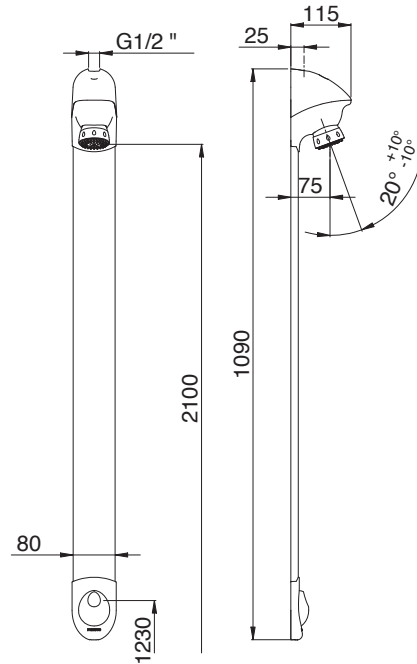

**> Working pressure:**

- 1 to 5 bar

**> Operation:**

- Soft trigger suitable for people with reduced mobility, children and the elderly

**> Flow:**

- 8l/min at 3 bar with integrated flow regulator
- Additional 6l/min regulator in the box
- Anti-water-hammering design
- Fixed shower head with orientable shower jet and anti-limescale spikes

**> Flow time:**

- 30 seconds (-10/+5 s.)

**> Hydraulic supply:**

- G 1/2" (15x21) top water inlet with straight stop valve for cold or premixed water

**> Material and colour finish:**

- Injected molded metal body and cover
- Extruded profile in Aluminium-Magnesium-Silicium alloy 6060
- Metal trigger, black finish

**> Thermal resistance:**

- Resistant to a temperature of 75°C for 30 minute-thermal-shocks

**> Security :**

- Patented anti-blocking "S®" system to avoid the water to flow continuously
- Control knob with antibacterial treatment

**> Delivered with :**

- VBA screws and nylon plugs
- Additional 6l/min regulator
- M G 1/2" - FG3/4" stop valve and filter
- Instruction manual

**> Standards & approvals :**

- Acoustic class I
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

